


Step 1: Transformation


Perform the transformation

There are a range of possible transformations one might use in a pre-treatment of biotic data. For some discussion regarding appropriate pre-treatment transformations, see [Chapter 9](#) in '*Change in Marine Communities*'. In the case of the Fal data set, we may choose to downweight considerably the contribution of highly abundant taxa. Our first (pre-treatment) step will be to transform the data to fourth roots, i.e., $y' = y^{\{0.25\}}$.


1. Launch PRIMER 8 and click on **File > Open...**, choose the trial data file '**Fal nematode abundance.pri**' (found in '**Examples_P8**' > '**Fal_benthic_fauna**') in the browser window and click **Open**.

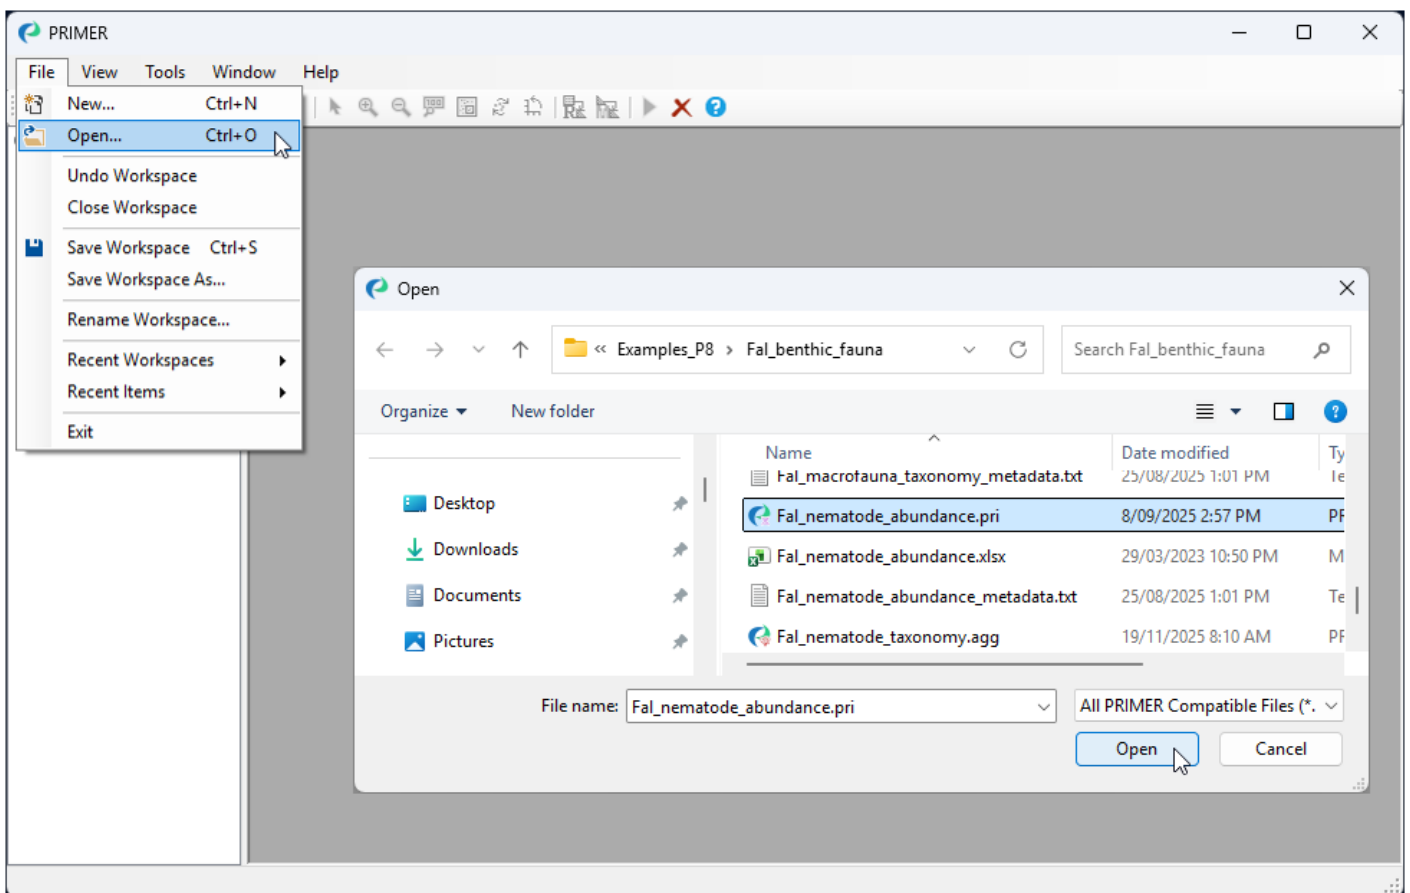

2. To perform an overall transformation of the data (i.e., on all variables), click **Pre-treatment > Transform(overall)....**

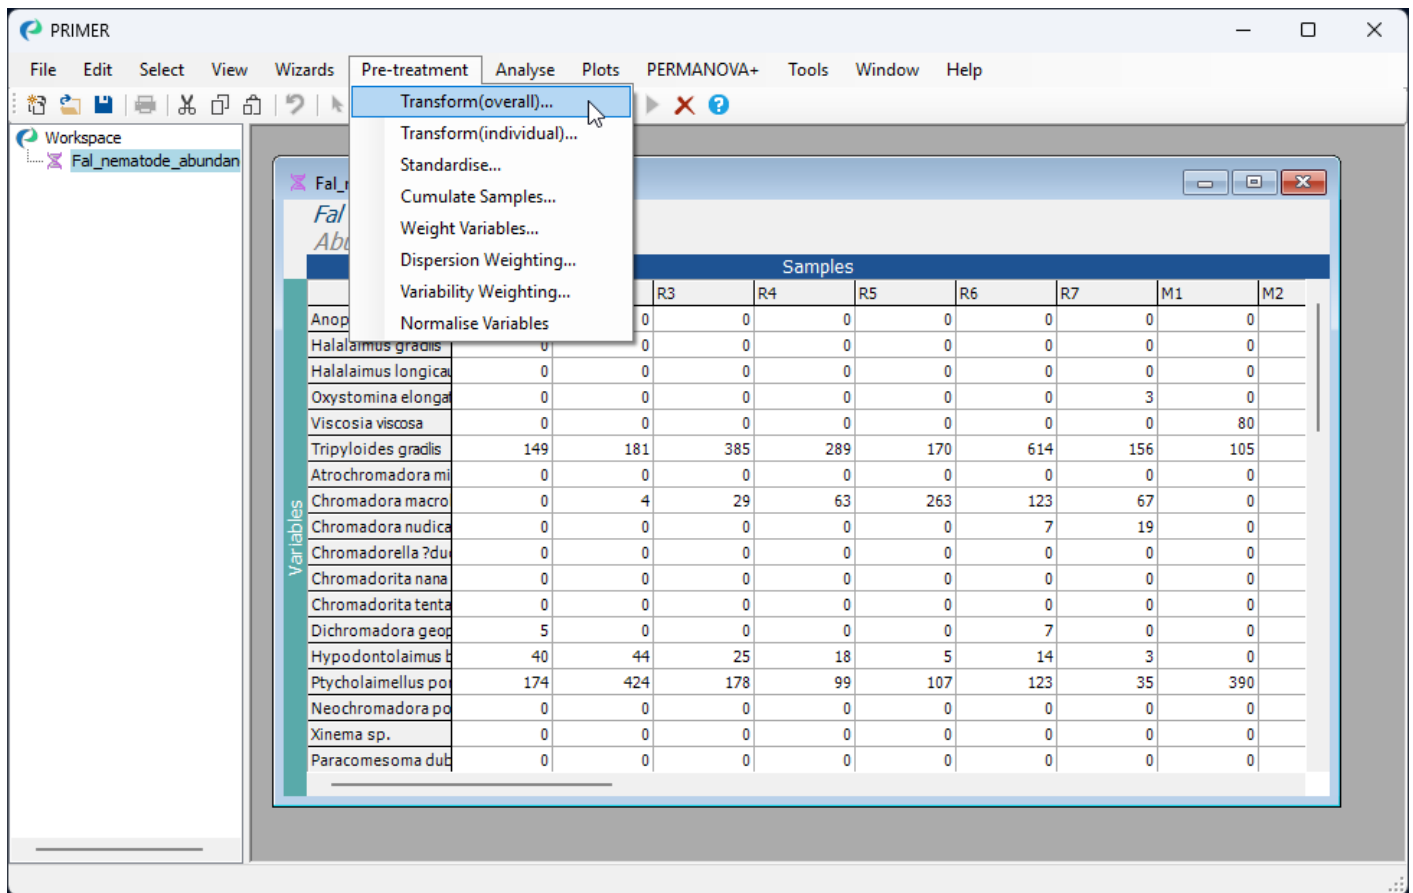

3. In the 'Overall Transform' dialog box, choose (Transformation: **Fourth root**), then click **OK**.

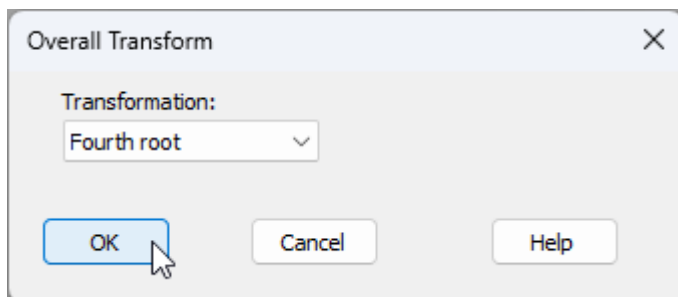

You should now see the transformed dataset (called '**Data1**') as the 'active window' in the PRIMER workspace. Note that the transformed datasheet has inherited all of the properties, factors and indicators that were associated with the original data as well.

The screenshot shows the PRIMER software interface. The main window is titled 'Overall Transform' and displays a table of data for 'Fal estuary nematodes Abundance'. The table has columns for 'Samples' (R1, R2, R3, R4, R5, R6, R7) and rows for various nematode species. The 'Data1' window is also open, showing the same data. The 'Workspace' panel on the left shows the project structure, including 'Fal_nematode_abundant', 'Overall Transform1', and 'Data1'.

	R1	R2	R3	R4	R5	R6	R7
Anoplostoma vivax	0	0	0	0	0	0	0
Halalaimus gradis	0	0	0	0	0	0	0
Halalaimus longicaudatus	0	0	0	0	0	0	0
Oxystomina elongata	0	0	0	0	0	0	1.3161
Viscosia viscosa	0	0	0	0	0	0	0
Tripyloides gradis	3.4938	3.6679	4.4296	4.1231	3.6109	4.9779	3.5341
Atrochromadora mi	0	0	0	0	0	0	0
Chromadora macro	0	1.4142	2.3206	2.8173	4.0271	3.3302	2.861
Chromadora nudica	0	0	0	0	0	1.6266	2.0878
Chromadorella ?du	0	0	0	0	0	0	0
Chromadorita nana	0	0	0	0	0	0	0
Chromadorita tenta	0	0	0	0	0	0	0

You will also see a small file (called 'Overall Transform1'), indicated by a little notepad (📝) in the Explorer tree. This shows a little more information regarding the choices you made for this particular run of the '**Transformation(overall)...**' routine.

The screenshot shows the 'Overall Transform1' notepad file. It contains the following information:

Overall Transform
Downweight high values

Data worksheet
Name: Fal_nematode_abundance
Data type: Abundance
Sample selection: All
Variable selection: All

Parameters
Transform: Fourth root

Outputs
Worksheet: Data1

The 'active window'

The active window is identified by slightly darker shading of its border within the PRIMER workspace. Its name is also shaded in the Explorer tree. When you want to run any particular routine in PRIMER, you will need to make sure that the correct dataset (or resemblance matrix) is


the active window when you launch that routine.

Notice that, although the transformed data ('Data1') is output as the active window after you do a transformation, the original datasheet is still in your workspace, and you can navigate back to it either by clicking on it's name in the Explorer tree (look right under the word 'Workspace' for 'Fal_nematode_abundance'), or by clicking on the window containing the datasheet itself inside the PRIMER workspace.


Re-name the transformed data

It is good practice to rename the datasheet corresponding to the transformed data for future reference within this workspace as you proceed with your work.


To re-name the datasheet within PRIMER, click on **File > Rename Data**.

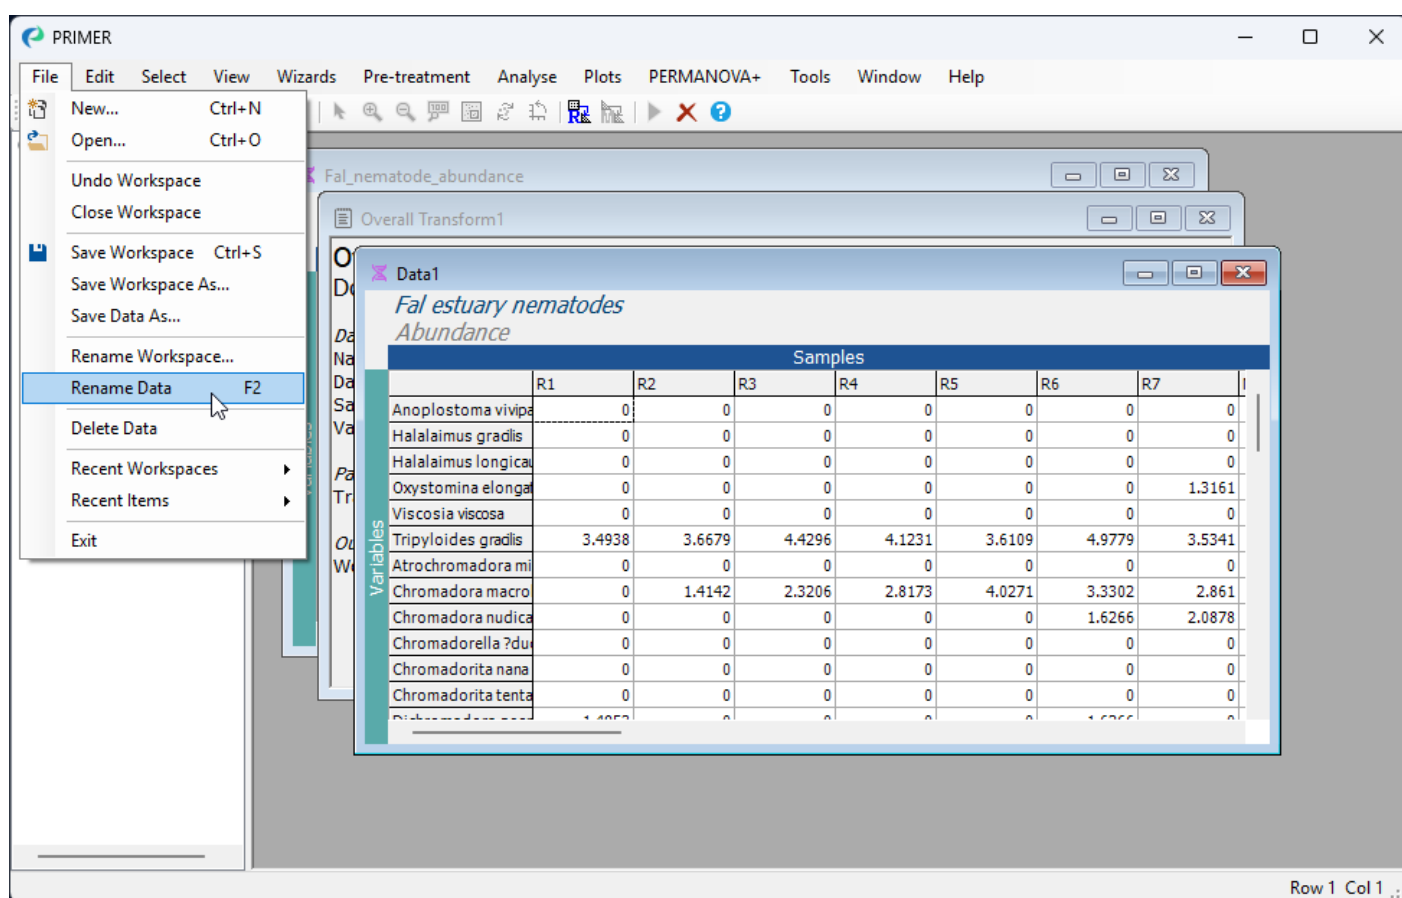

In the dialog box, type the new name you want to call it (in this example, we could re-name the sheet containing transformed data as '4th-root', as shown below), then click **OK**.

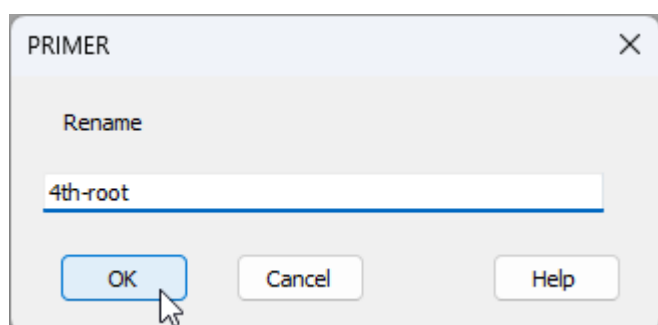

Alternatively, you can simply click and hover over the word 'Data1' in the Explorer tree window, and you will be able to change the name *in situ* right there, viz:



Before heading on to Step 2, you can optionally also now click on **File > Save Workspace** to save your full workspace thus far (you could use the name 'Fal_Workspace.pwk', for example).

Revision #13

Created 4 March 2025 22:01:30 by Abby Miller

Updated 10 February 2026 01:30:35 by Marti